



Series	AGM-S	Warranty	See Warranty Terms
Volts	12	Design	Grp 31
Cells	6		
Terminal Type	F12(M8) and TP08 Adapter [+21mm]		
Included Hardware	M8 stainless bolts & washers & TP08 adapter		
Size & Thread	M8		

### Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	25 A
Maximum Charge Current	35 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	5 mΩ

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	800
Marine Crank Amps (MCA) 32°F / 0°C	1000
Reserve Capacity (RC @ 25A)	220 Minutes
Reserve Capacity (RC @ 75A)	70 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>128 AH</b>	<b>1.28 A</b>
@ 20 Hour Rate	<b>115 AH</b>	<b>5.75 A</b>
@ 10 Hour Rate	<b>105 AH</b>	<b>10.5 A</b>
@ 5 Hour Rate	<b>97 AH</b>	<b>19.3 A</b>

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	62.1	33	27	18.2	11.9	10.5

### Specifications


 SAI GLOBAL ISO 9001 Quality	Weight	32 kg	70.5 lbs
	Length	328 mm	12.91"
	Width	175 mm	6.89"
	Height Incl. Term.	220 mm	8.66"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.


Container	ABS
Cover	ABS
Handles	Nylon Strap

- Plastics are UL94 HB (UL94 V0 available)
- Valve regulated design with integral flame arrestor
- Non-hazardous, Non-spillable

### Cycle Life vs. Depth of Discharge

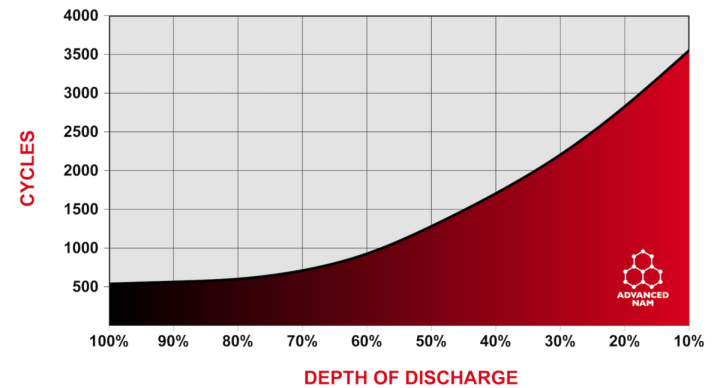

### Capacity vs. Temperature

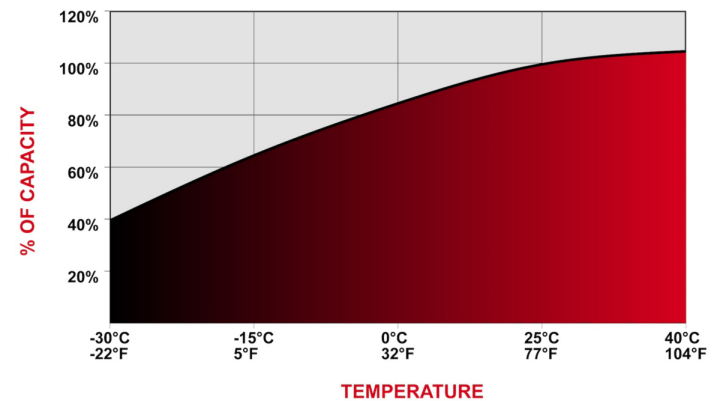

### Detailed Illustration

