



Series	4000	Warranty	3 Years
Volts	6	BCI	L16
Cells	3	Plates/Cell	17
Terminal Type	LT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		
Cables	Optional: 19" 4/0 interconnect cable		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	50 A
Maximum Charge Current	85 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1040
Marine Crank Amps (MCA) 32°F / 0°C	1299
Reserve Capacity (RC @ 25A)	861 Minutes
Reserve Capacity (RC @ 75A)	226 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>512 AH</b>	<b>5.12 A</b>
@ 72 Hour Rate	<b>498 AH</b>	<b>6.92 A</b>
@ 50 Hour Rate	<b>481 AH</b>	<b>9.61 A</b>
@ 20 Hour Rate	<b>445 AH</b>	<b>22.25 A</b>
@ 15 Hour Rate	<b>418 AH</b>	<b>27.89 A</b>
@ 10 Hour Rate	<b>401 AH</b>	<b>40.05 A</b>
@ 8 Hour Rate	<b>383 AH</b>	<b>47.84 A</b>
@ 5 Hour Rate	<b>356 AH</b>	<b>71.20 A</b>
@ 1 Hour Rate	<b>209 AH</b>	<b>209.15 A</b>


Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications

	Weight	55.5 kg	122.5 lbs
	Length	31.8 cm	12.5"
	Width	18.1 cm	7.13"
	Height Inc. Term.	42.55 cm	16.75"
Electrolyte Reserve	57 mm	2.25"	
Container	High Density Polypropylene		
Cover	High Density Polypropylene		
Handles	Rope / Plastic Handle		

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

### Cycle Life vs. Depth of Discharge

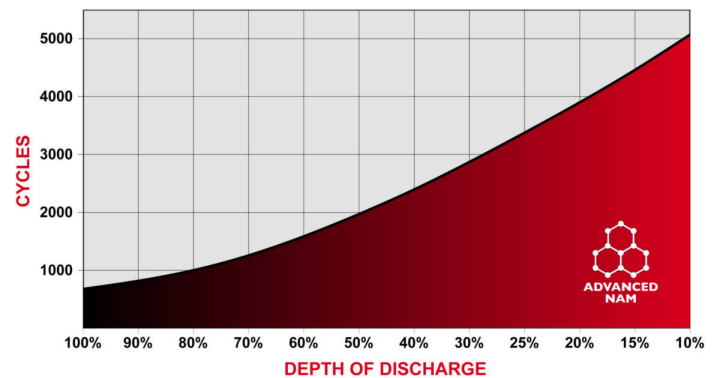

### Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

### Detailed Illustration

