



**ALPHA
OUTBACK
ENERGY**




SPC III 6000-48

Solar Off Grid-Hybrid Inverters

Features

- ① Output Power Factor 1
- ② Built-in MPPT Charge Controller
- ③ PV Array Open Circuit Voltage up to 500VDC
- ④ Up to 6000W PV Array Power
- ⑤ Detachable LCD control module with various communications. Can be turned to remote panel.
- ⑥ Built-in WiFi or Bluetooth for mobile monitoring (App is available)
- ⑦ Reserved communication port for BMS (RS485, CAN-BUS or RS232)
- ⑧ Lithium-ion battery compatibility
- ⑨ Replaceable fan design for ease of maintenance
- ⑩ Battery Independency: Supply load from Grid or PV, even battery is not available
- ⑪ Configurable AC/PV output usage timer and prioritization
- ⑫ Selectable high power charging current
- ⑬ Selectable input voltage range for home appliances and personal computers
- ⑭ Compatible to Utility Mains or generator input
- ⑮ Auto restart while AC is recovering
- ⑯ Cold start function when grid is not available

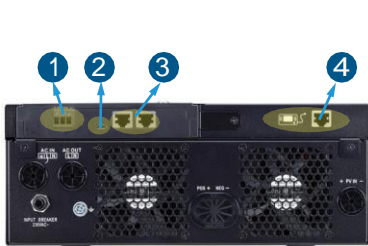

① Dry contact



② USB On-the-Go function



③ Reserved communication port


(RS-485, CAN-BUS or RS-232) for BMS




④ Communication for Remote panel



With battery connected

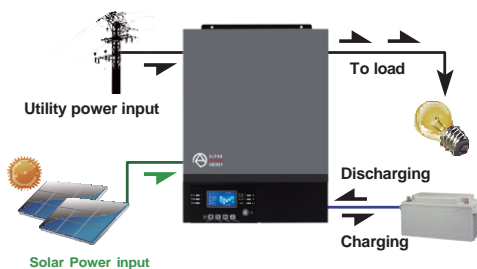

Without battery connected

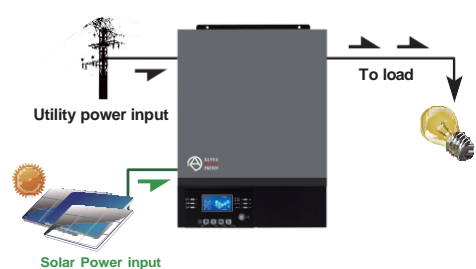



**ALPHA
OUTBACK
ENERGY**



MODEL **SPC III 6000-48**

Rated Power 6000VA/6000W

INPUT

Voltage 230Vac
 Selectable Voltage Range 170-280 VAC (For Personal Computers) ; 90-280 VAC (For Home Appliances)
 Frequency Range 50 Hz/60 Hz (Auto sensing)

OUTPUT

AC Voltage Regulation (Batt. Mode) 230Vac +/- 10%
 Surge Power 12000VA
 Efficiency (Peak) 93%
 Transfer Time 15 ms (For Personal Computers) : 20 ms (For Home Appliances)
 Waveform Pure sine wave

BATTERY

Battery Voltage 48 Vdc
 Floating Charge Voltage 54 Vdc
 Overcharge Protection 63 Vdc

SOLAR CHARGER & AC CHARGER

Solar Charger Type MPPT
 Maximum PV Array Power 6000W
 MPP Range @ Operating Voltage 120 ~ 450 VDC
 Maximum PV Array Open Circuit Voltage 500 VDC
 Maximum Solar Charge Current 120A
 Maximum AC Charge Current 100A
 Maximum Charge Current 120A

PHYSICAL

Dimension, D x W x H (mm) 115 x 300 x 400
 Communication Interface USB/RS232/RS485/WiFi/Dry-cont
 Net Weight (kgs) 10

ENVIRONMENT

Humidity 5% to 95% Relative Humidity (Non-condensing)
 Operating Temperature -10°C to 50°C
 Storage Temperature -15°C to 60°C

All information contained in this document is subject to change without notice.



Worldwide Corporate Offices

Headquarter Germany

Hansastraße 8
 D-91126 Schwabach
 Tel: +49 9122 79889 0
 Fax: +49 9122 79889 21
 Mail: info@alpha-outback-energy.com

Eastern Europe

ee@alpha-outback-energy.com

Middle East

me@alpha-outback-energy.com

France and Benelux

fbnl@alpha-outback-energy.com

Spain

spain@alpha-outback-energy.com

Africa

africa@alpha-outback-energy.com

Alpha and Outback Energy GmbH reserves the right to make changes to the products and information contained in this document without notice. Copyright © 2020 Alpha and Outback Energy GmbH. All Rights reserved.

For more information, please visit www.alpha-outback-energy.com



Datashheet: revA_2522